

ATLANTIS®

RE-ATLANTIS INTERPRISE CO., LTD

MECHNICAL / INDUSTRIAL GLASS THERMOMETER GATALOG CATALOG



ATLANTIS®

RE-ATLANTIS ENTERPRISE CO.,LTD.
1F, No.109, Sec. 2, Zhiyuan 1st Rd.,
Beitou District, Taipei City
TEL : +886-2-2820-3405
FAX : +886-2-2820-3406
<https://www.re-atlantis.com/>

Due to the variety of customization, the product pictures are only for your reference, please confirm the actual item appearances with our sales.
(If there is any change on specification, please take the latest version as standard.)

Ver.3.0



BTT

Bimetal Thermometer (Back Mount Type)

Application: Is suitable for medium/low temperature on-site measurement, widely apply to machinery, food, catering and industry environments.

Model: BTT

Size: 1", 1.5", 2", 2.5", 3", 4", 5", 6"

Temperature range: -50 ~ 600°C

Measuring elements: Bi-metal

Window: Glass

Thread material: SS304

Stem length: 63mm ~ 2032mm

Accuracy: 1.5% / 1.0%

Protection level: IP 54



BTA

Bimetal Thermometer (Adjustable Angle Type)

Application: Is suitable for medium/low temperature on-site measurement, suitable in machinery, food and catering industry.

Model: BTA

Size: 3", 4", 5", 6"

Temperature range: -50 ~ 600°C

Measuring elements: Bi-metal

Window: Glass

Thread material: SS304

Stem length: 63mm ~ 2032mm

Accuracy: 1.5% / 1.0%

Protection level: IP 54



BTI

Bimetal Thermometer (Bottom Mount Type)

Application: Is suitable for medium/low temperature on-site measurement, widely apply to machinery, food, catering and industrial environments.

Model: BTI

Size: 3", 4", 5", 6"

Temperature range: -50 ~ 600°C

Measuring elements: Bi-metal


Window: Glass

Thread material: SS304

Stem length: 63mm ~ 2032mm

Accuracy: 1.5% / 1.0%

Protection level: IP 54

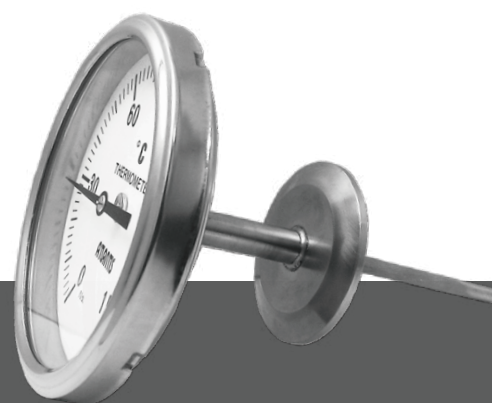

BTT-S

Sanitary Bimetal Thermometer (Back mount type)

Application: Specially design for food machine or sanitary clamp, the open design allowing easy cleaning, eliminated to prevent impurity generated.

Model: BTT-S

Size: 2", 2.5", 3", 4", 5", 6"

Temperature range: -50 ~ 600°C

Measuring elements: Bi-metal

Process connection size: Tri-Clamp 0.75", 1", 1.5", 2", 2.5", 3"

Window: Glass

Thread material: SS304

Stem length: 4" ~ 80"

Accuracy: 1.5% / 1.0%

Protection level: IP 54 / IP65



BTI-S

Sanitary Bimetal Thermometer
(Bottom mount type)

Application: Specially design for food machine or sanitary clamp, the open design allowing easy cleaning, eliminated to prevent impurity generated.

Model: BTI-S

Size: 2.5", 3", 4", 5", 6"

Temperature range: -50 ~ 600°C

Measuring elements: Bi-metal

Process connection size: Tri-Clamp 0.75", 1", 1.5", 2", 2.5", 3"

Window: Glass

Thread material: SS304

Stem length: 4" ~ 80"

Accuracy: 1.5% / 1.0%

Protection level: IP 54 / IP65



ITI-M

Gas-actuated Thermometer
(For Marine Type)

Application: Measuring principle adopts gas- actuated to ensure fast reaction to ambient temperature.

Model: ITI-M

Size: 3", 4", 5", 6"

Temperature range: -50 ~ 650°C

Measuring elements: Gas-actuated

Accuracy: 1.0%

Thread material: SS304

Window: Glass

Protection level: IP65



ITI

Medium-Actuated Thermometer

Application: Higher resistant-performance to acute temperature change than general bimetal thermometer, suitable for a wide range of industrial environments.

Model: ITI

Size: 3", 4", 5", 6"

Temperature range: -50 ~ 600°C

Measuring elements: Media-expansion

Accuracy: 1.5% / 1.0%

Thread material: SS304

Window: Glass

Protection level: IP54



BT-BM

Bimetal Thermometer
(Bar Magnets Type)

Application: The magnetic block on the back absorbs the horizontal surface and measures its surface temperature, suitable for non-intrusive pipeline needs.

Model: BT-BM

Size: 2", 2.5", 3", 4"


Temperature range: -50 ~ 600°C

Measuring elements: Bi-metal spiral spring

Window: Glass (Safety glass only available for size > 2.5")

Accuracy: 2.5%

Protection level: IP 54

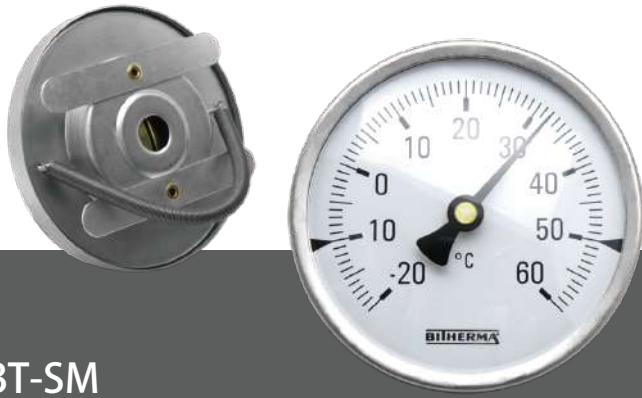

BT-SM

Pipe-Clamp Surface Thermometer

Application: It can apply to heater, ventilation, air-conditioning and wastewater treatment operating system, suitable for pipeline surface temperature measurement.

Model: BT-SM

Size: 2", 2.5", 3", 4"

Temperature range: -40 ~ 400°C

Measuring elements: Bi-metal spiral spring

Measuring elements: Bi-metal spiral spring

Window: Glass (with raised edge)

Accuracy: 2.0%

Protection level: IP 54



RT50

Remote Reading Small Thermometer with Capillary

Application: Higher resistant-performance to acute temperature change than bimetal thermometer.

Model: RT50

Size: 2"

Temperature range: 0 ~ 120°C

Measuring elements: Bourdon tube

Accuracy: 3.0%

Stem Material: Copper alloy

Capillary length: 1m

Window: PC

Protection level: IP54



FT series

Remote Reading Thermometer

Application: Suitable for high temperature and high vibration frequency environments, high sensitive reaction to temperature change, higher resistance to acute temperature change than bimetal thermometer.

Model: FT series

Size: 3", 4", 5", 6"

Temperature range: -50 ~ 650°C


Measuring elements: Gas-actuated / Liquid-actuated

Accuracy: ±1.0%

Stem material: SS304 / SS316

Window: Glass

Protection level: IP54 / IP65

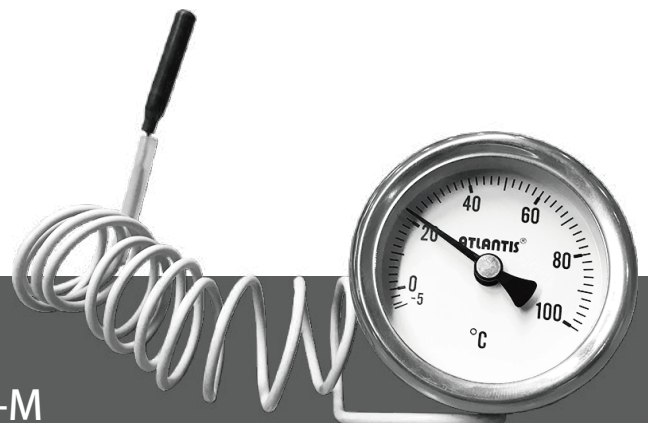

FT-M

Small Remote Reading Thermometer

Application: Applicable to measure temperature of dry machine, food, refrigeration and air conditioning, and environmental oil-water separation equipment.

Model: FT-M

Size: 2", 2.5"

Temperature range: -5 ~ 100°C

Accuracy: 4.0%

Liquid-in-capillary: Kerosene or other fluid

Stem material: Copper alloy

Stem length: 36mmL

Capillary length: 1m

Window: PC



TR

Temperature Recorder

Application: Rotating paper recorder, single and dual pen circular temperature record.

Model: TR

Size: 8", 10", 12"

Pressure range: -50°C to -500°C

Measuring elements: Bourdon tube

Accuracy: 1.5%

Thread: Copper alloy / SS304

Window: Glass / Tempered glass

Recording period: 12 hours/24 hours, 7 days a cycle



FDT

Industrial Glass Thermometer
(for autoclave type)

Application: Are specially designed for high temperature sterilization equipment in food, pharmaceutical and canning industry, use with a remote recording thermometer or pressure gauge.

Model: FDT

Size: 9"

Temperature range: 80 ~ 135°C

Measuring elements: Thermal expansion linearity of mercury

Liquid in glass: Mercury

Accuracy: 0.5%

Thread material: Stainless steel

Window: Glass



PGL6

6" / 6.5" Industrial Glass Thermometer
(L type)

Application: Is mainly apply to measure temperature in cold or hot water pipeline, boiler or air-conditioning system.

Model: PGL6

Size: 6"

Temperature range: -5°C~55°C / -10°C~50°C / 0°C~100°C

Measuring elements: Liquid-expansion

Liquid-in-glass: Red organic liquid

Accuracy: 1.0%

Thread material: Copper alloy

Window: Glass

Protection level: IP43



PGS6

6" Industrial Glass Thermometer
(Bottom mount type)

Application: Is mainly apply to measure temperature in cold or hot water pipeline, boiler or air-conditioning system.

Model: PGS6

Size: 6"

Temperature range: -10°C~50°C / 0°C~100°C

Measuring elements: Liquid-expansion

Liquid-in-glass: Red organic liquid

Accuracy: 1.0%

Thread material: Copper alloy

Window: Glass

Protection level: IP43



BTIC

Bimetal Thermometer with Electrical Contact
(Bottom Mount Type)

Application: Suitable for high accuracy activation with zero- delay requirements, the protection level of concealed wiring type is higher than open wiring one.

Model: BTIC

Size: 3", 4", 6"

Temperature range: -50 ~ 600°C

Measuring elements: Bimetal

Accuracy: 1.5% / 1.0%

Thread material: SS304

Window: Acrylic

Contact type: Sliding switch SPST

Number of contacts: SPSTx1 / SPSTx2 / SPSTx4

Protection level: IP54



BTAC

Bimetal Thermometer with
Electrical contact (Adjustable Angle Type)

Application: Is used to control the facility connected to the thermometer, which makes it suitable for various industrial application.

Model: BTAC

Size: 3", 4", 6"

Temperature range: -50 ~ 600°C

Measuring elements: Bimetal

Accuracy: 1.5% / 1.0%

Thread material: SS304

Window: Acrylic

Contact type: Sliding switch SPST

Number of contacts: SPSTx1 / SPSTx2 / SPSTx4

Protection level: IP54



BTTC

Bimetal Thermometer with Electrical Contact
(Back Mount Type)

Application: Is used to control the facility connected to the thermometer, which makes it suitable for various industrial application.

Model: BTTC

Size: 3", 4", 6"

Temperature range: -50 ~ 600°C

Measuring elements: Bimetal

Accuracy: 1.5% / 1.0%

Thread material: SS304

Window: Acrylic

Contact type: Sliding switch SPST

Number of contacts: SPSTx1 / SPSTx2 / SPSTx4

Protection level: IP54



MS-FT Series

Remote Reading Thermometer with
Electrical Contact (Micro Switch Type)

Application: Remote reading thermometer with micro switch, features high contact rating 5A, which is suitable for temperature control in high current environment.

Model: MS-FT Series

Size: 4", 6"

Temperature range: -200 ~ 600°C

Measuring elements: Gas-actuated / Liquid-actuated

Accuracy: 1.0%

Thread material: SS304

Window: Glass / Safety glass

Switch contact type: Single pole double throw SPDT

Contact number: SPSTx1 / SPSTx2

Protection level: IP65

TGA9

9" Adjustable Angle Industrial Glass Thermometer

Application: The adjustable angle thermometer can apply to industrial environment such as pipeline or wind tunnel.

Model: TGA9

Size: 9"

Temperature range: -40 ~ 400°C

Measuring elements: Liquid-expansion

Liquid-in-glass: Red and black scale

Accuracy: 1.0%

Thread material: Aluminum alloy

Window: Glass

Protection level: IP43



RG series

Metal Tube Industrial Glass Thermometer

Application: Suitable for using in merchant ship, fishing boat, high temperature exhaust environment and others industrial application.

Model: RG series

Installation type: Straight with thermowell / 90° angle with thermowell

Temperature range: -10~600°C

Accuracy: ±0.5°C / 1°C / 2°C / 5°C / 6°C
(Depends on temp. range)

Measuring elements: Liquid-expansion

Liquid-in-glass: Red or blue organic liquid

Thread material: Copper alloy /

Anodized chrome-plated steel / Stainless steel



SG series

Metal Tube Industrial Glass Thermometer

Application: Suitable for using in merchant ship, fishing boat, high temperature exhaust environment and others industrial application.

Model: SG series

Installation type: Straight with thermowell / 90° angle with thermowell

Temperature range: -10~600°C

Accuracy: ±0.5°C / 1°C / 2°C / 5°C / 6°C
(Depends on temp. range)

Measuring elements: Liquid-expansion

Liquid-in-glass: Red or blue organic liquid

Thread material: Copper alloy /

Anodized chrome-plated steel / Stainless steel



VG series

V-shape Aluminum Case Glass Thermometer

Application: Suitable for using in merchant ship, fishing boat, high temperature exhaust environment and others industrial application.

Model: VG series

Installation type: Straight with thermowell / 90° angle with thermowell / 135° angle with thermowell


Temperature range: -60~600°C

Accuracy: ±0.5°C / 1°C / 2°C / 5°C / 6°C
(Depends on temp. range)

Measuring elements: Liquid-expansion

Liquid-in-glass: Red or blue organic liquid

Thread material: Copper alloy / Chrome-plated steel / Stainless steel

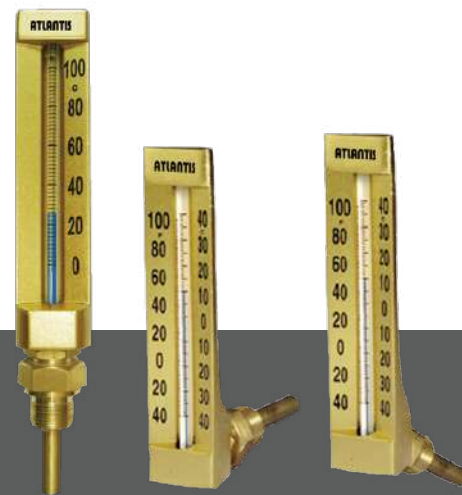



FTC series

Remote Reading Thermometer
with Electrical Contact

Application: The remote reading thermometer equipped with a buzzer, a flashing indicator or a relay to remote control and monitor connected facility.

Model: FTC series

Size: 3", 4", 6"

Temperature range: -50 ~ 650°C

Measuring elements: Gas-actuated / Liquid-actuated

Accuracy: 1.0%

Thread material: SS304

Window: Acrylic

Switch contact type: Sliding switch SPST

Number of contacts: SPSTx1 / SPSTx2 / SPSTx4

Protection level: IP54



MS-FTXWF Series

Remote Reading Explosion-proof Thermometer
with Electrical Contact (Micro Switch Type)

Application: Reading thermometer with micro switch, which is suitable for temp control in high current and hazardous environment.

Model: MS-FTXWF Series

Size: 6"

Temperature range: -200 ~ 650°C

Measuring elements: Gas-actuated / Liquid-actuated

Accuracy: 1.0%

Thread material: SS304

Window: Acrylic

Switch contact type: Single pole double throw SPDT

Number of contacts: SPSTx1 / SPSTx2

Protection level: IP65



MS-IT Series

Media-actuated Thermometer
with Electrical Contact

Application: Remote reading thermometer with micro switch, which is suitable for temperature control in high current environment.

Model: MS-IT Series

Size: 4", 6"

Temperature range: -200 ~ 600°C

Measuring elements: Gas-actuated / Liquid-actuated

Accuracy: 1.0%

Thread material: SS304

Window: Glass / Safety glass

Switch contact type: Single pole double throw SPDT

Contact number: SPSTx1 / SPSTx2

Protection level: IP65