

## Can Vacuum Tester Model: CVT



Due to the variety of customization, the picture is only for reference, please confirm the actual item with our sales. (If there is any change on specification, please take the latest version as standard.)


### Main Specification

- ▼ **Size**  
2.5"
- ▼ **Window**  
PC  
O-ring sealed
- ▼ **Pressure connection**  
Material: Copper alloy  
1/4" PF
- ▼ **Pressure range**  
-76...0cmHg
- ▼ **Ambient temperature**  
-40°C to +60°C
- ▼ **Fluid temperature**  
+65°C
- ▼ **Protection level**  
IP54
- ▼ **Accessory**  
Vacuum gauge with penetration needle  
Copper nut  
Silicone rubber socket

### Other Specifications

- ▼ **Ring**  
Stainless steel  
Screw fixed
- ▼ **Case**  
SS 304
- ▼ **Pointer**  
Aluminum with black enamel
- ▼ **Dial face**  
Red scale
- ▼ **Measuring elements**  
Bourdon tube  
Material: copper alloy
- ▼ **Movement**  
Copper alloy
- ▼ **Accuracy**  
±2.0%F.S.

## Dimension

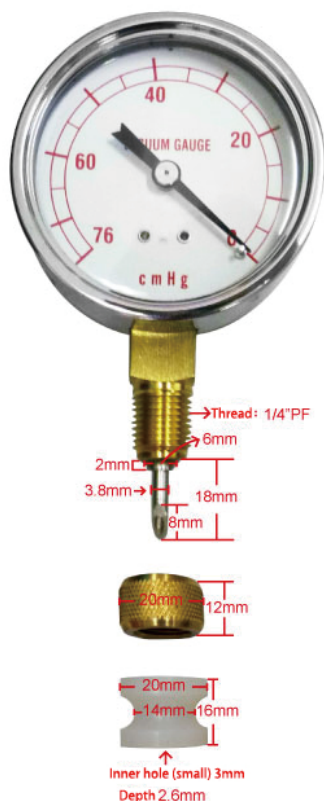

## Features

- Vacuum gauge with penetration needle
- Specially designed for testing can vacuum
- Socket material adopts silicone rubber

