

## Main Specifications

## ▼ Type

DPG-X3.0S (Standard)  
DPG-X3.0C (Record Type)  
<Option>

## ▼ Installation type

Bottom mount /  
Back mount with front flange

## ▼ Size

3" (80mm)

## ▼ Connection

Material: Stainless steel 304  
M20\*1.5  
G1/4"  
<Customizable>

## ▼ Pressure range

Please refer to pressure range  
table

## ▼ Applicable media

Liquid and gas that compatible  
with material of connection

## ▼ Operating temperature

-10~60°C

## ▼ Storage temperature

<85%RH

## ▼ Appliances Protect

Anti-electromagnetic  
interference design

## ▼ Protect level

IP50  
IP54 (with protect case)  
<Customizable>

## Other Specifications

## ▼ Case material

Stainless steel 304

## ▼ Overload pressure

150% (>10MPa)

200% (≤10MPa)

## ▼ Screen display

Max. 5 digits LCD

## ▼ Pressure unit

MPa, bar, kgf/cm<sup>2</sup>, mH<sub>2</sub>O, psi, kPa,  
mmHg, Torr, mbar, cmH<sub>2</sub>O, Pa  
<Unit set changes base on  
pressure working range>

## ▼ Power supply

Bottom mount ▼  
DC 24V / 3V (AAA battery\*2)  
(DC 24V is not available for Record  
Type)

Back mount with front flange ▼

DC 24V

## ▼ Memory (Record Type)

Permanent EEPROM  
10000 pieces of data storable

## ▼ Power display

3 segment display

## ▼ Power consumption

<0.005W

## ▼ Accuracy

±0.4%F.S.  
±0.2%F.S. (Partial)

## Digital Pressure Gauge

### Model: DPG-X3.0 Series

### <New DPG-3.0>

## Introduction

With a built-in high-precision pressure sensor, which can accurately and instantly display pressure with high precision and good long-term stability. It is suitable for portable pressure measurement, equipment matching, and calibration equipment.



Due to the variety of customization, the picture is only for reference, please confirm the actual item with our sales. (If there is any change on specification, please take the latest version as standard.)




## Features

- OEM service
- Wider LCD screen · 13 units switchable
- Dynamic display of pressure percentage (By bar chart)
- Low power consumption , battery life lasts more than 12 months
- Zeroing, backlighting, and peak recording are available
- Dedicated data communication cable, support USB data export (only for record type)

### Pressure Range Table


Type Pressure	DPG-X3.0S (Standard)	DPG-X3.0C (Record Type)	Code
Micro pressure	0~6...10...100 kPa	0~10...40...60 kPa	K01
Medium pressure	0~0.16...0.25...10 MPa	-	K02
High pressure	0~16...25...100 MPa	0~10...25...60 MPa	K03
Super high pressure	-	0~100...160 MPa	K04
Regular	-	0~0.1...1.0...6 MPa	K05
Compound/Negative pressure	-100...-6~6...10...1000 kPa	-0.1~0...0.1...1.6 MPa	K06
Differential pressure	-0.1~0.1...0.25...25 MPa	-	K07
Absolute pressure	0~10...25...1000 kPa	-	K08

### Dimensions

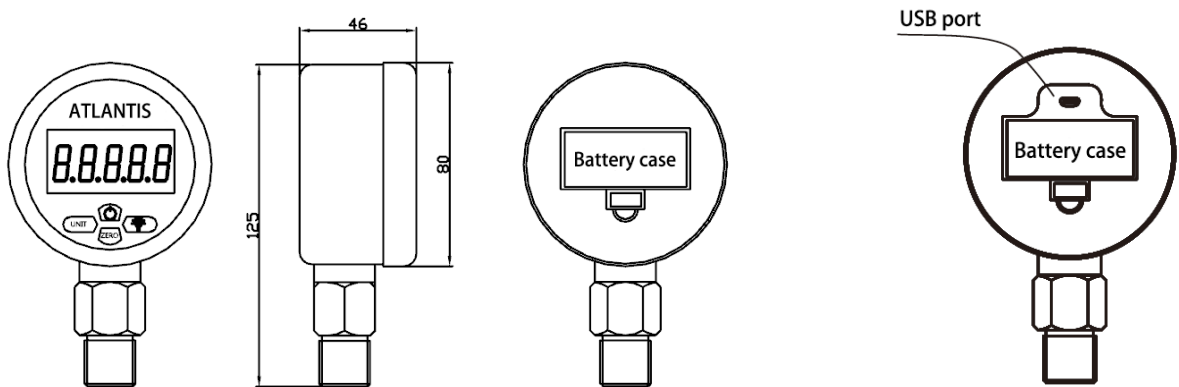

Bottom mount (Standard)

Record Type

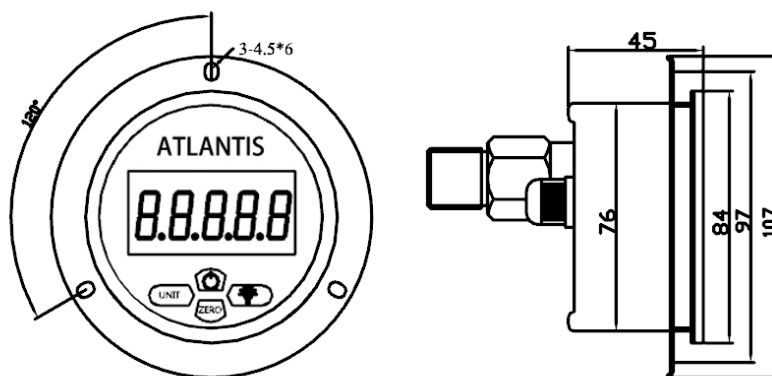

Back mount with front flange

Unit : mm

## How to order

DPG-X3.0 Series Digital Pressure Gauges									
Std.	Spec.	Code	Item	Code	Item	Code	Item	Code	Item
S	Type	S	S (Standard)	C	C (Record Type)	–	–	–	–
A	Installation type	A	Bottom mount	B	Back mount with front flange	–	–	–	–
M20	Connection	M20	M20*1.5	G2	G1/4"	O	Other	–	–
Custom	Pressure Range	Please refer to the pressure range table and select the corresponding code							
3V	Power supply	DC	DC 24V	3V	AAA battery*2	–	–	–	–
/B	Other requests	/A	Third party notarized document						
		/B	Inspection report (issued by Re-Atlantis)						
		/C	Tag						
		/D	Adaptors						
		/E	Protective case						

Order example: DPG-X3.0 - S - A - M20 - K06 - 3V - /B