

Main specifications

▼Type

AT-UA simple type  
AT-UB rigid type

▼Connection

AT-UA simple type ▼  
Rubber hose  
AT-UB rigid type ▼  
1/4" PT (female)

▼Installation type

Wall mount

▼Measurement range

±100 / ±150 / ±250 / ±400 /  
±500mm

Other specifications

▼Case

Aluminum alloy

▼Scale

1mm - 1 scale

▼Tube

AT-UA:  
U-shape glass tube Ø9x5

AT-UB:  
2x Vertical glass tube Ø9x5

▼Fix clamp (AT-UA type only)

Acrylic

▼Valve (AT-UB type only)

Vent and exhaust valve


# Liquid Column Manometer

## Model: LCM Series


### Introduction

Liquid column manometer consists of glass tube with high precision scale in aluminum alloy socket. UA and UB type liquid column manometer is used for measuring pipeline wind pressure or differential pressure in laboratory or process pipeline in factory.

### Dimension

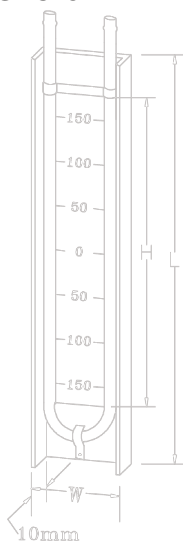


LCM-AT-UA

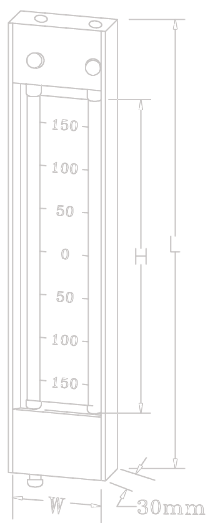

LCM-AT-UB

Type	Measurement range (mm)	Size (mm)		
		L	H	W
AT-UA-200	±100	300	200	50
AT-UA-300	±150	400	300	50
AT-UA-500	±250	600	500	50
AT-UA-800	±400	900	800	50
AT-UA-1000	±500	1100	1000	50
AT-UB-200	±100	300	200	60
AT-UB-300	±150	400	300	60
AT-UB-500	±250	600	500	60
AT-UB-800	±400	900	800	60
AT-UB-1000	±500	1100	1000	60

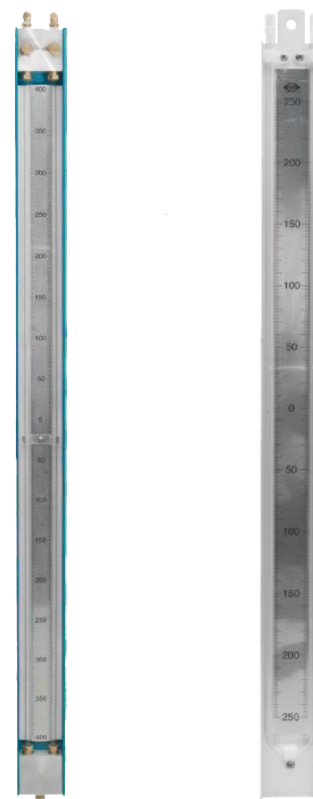

LCM-AT-UA

LCM-AT-UB

Due to the variety of customization, the picture is only for reference, please confirm the actual item with our sales. (If there is any change on specification, please take the latest version as standard.)

### Features

- Aluminum alloy case rigid design
- High precision scale ensures clear observation
- Wall mount easy installation
- Various range and size for selection

### How to order

Model	Code	Type	Code	Measurement range
LCM	AT-UA:	AT-UA simple type	200:	±100
	AT-UB:	AT-UB rigid type	300:	±150
			500:	±250
			800:	±400
			1000:	±500

Order example: LCM - AT-UA - 300